

# MOTOMAN FS100

Industrial Robot Controller

The YASKAWA FS100 controller generation has been specially developed for the Picking and Packing sectors and for further handling applications. The development goal was “Fast, safe, open, small”.

Real-time processing of sensor signals, reactions to camera information and other high-speed applications are thus made possible.

All in all, the FS100 thus exploits its superlative performance capabilities to the full in applications where high flexibility is required.

Another modern feature is the open concept of the controller which enables users to access robot interfaces and motions externally via a PC or PLC and also to develop their own applications. Interfaces such as MotoPlus allow the controller to function as a slave of the higher-level controller in a line; this means that it is programmed in your customary PLC language.

The streamlined and compact design requires little space for installation, thereby saving valuable production space. The FS100 thus offers particular advantages for line builders.

## KEY BENEFITS

- High flexibility for variable packaging solutions
- Safe and fast
- Space-saving, streamlined and compact
- Energy-saving



# High Performance Controller FS100 for MOTOMAN Robots

## Open Controller

Connection of FS100 to the existing overall system with the YASKAWA software solutions

- MOTOPlus
- MOTO GSI
- Windows operating system

## Advanced Robot Motion Function (ARM)

Dynamic calculation of torque and loads on the robot axes

- Extremely high path accuracy
- Optimal robot motion and velocity
- Vibration control
- Highly sensitive collision detection

## Communication

Ethernet, Web (FTP, OPC) Server options and all common fieldbus systems

- Easy integration into existing networks
- Remote monitoring and diagnosis of robot systems

Programming pendant	
Dimensions	169 (W) x 314.5 (H) x 50 (D)
Touchscreen display	5.7" colour LCD (640 x 480 pixels)
Weight	0.986 kg
Coordinate system	Joint, Rectangular/cylindrical, Tool, User-coordinates
Speed adjustment	Fine adjustment possible during operation or teach mode
Shortcuts	Direct access keys and user selectable screen keys possible
Language	Mostly spoken languages available (worldwide)
Interface	Compact Flash card slot, USB port
Operating system	Windows CE

Programming	
Programming language	INFORM III
Robot motion control	Joint motion, linear, circular, spline interpolation
Speed adjustment	Joint motion (% of maximum) Interpolation (mm/sec; cm/min; inch/min) Angular velocity (°/sec)

## Additional Benefits

- Multitasking (free of extra charge)
- Integrated PLC
- Highest performance due
- Boot time: max. 50 sec.
- MTTR (Mean Time To Repair): < 5 min.

## Programming Pendant (PHG) – ergonomical, light and easy

5.7" LCD colourdisplay  
Touch screen  
Windows operating system

Operation keys start/stop emergency off

Flash card slot

Cursor key

USB-Connection (reverse side)

Main axes keys

Additional axes keys

3 position dead man switch (rear side – not visible)

Display can be individually set for each application



- Easy and fast programming
- Several user levels – from operator to safety mode
- Help function

Maintenance	
Functions	System monitor, internal maintenance clocks (e.g. Servo power-on time)
Self-diagnosis	Classifies errors and major/minor alarms and displays the data
User alarm display	Alarm messages for peripheral devices
Alarm display	Alarm messages and alarm history
I/O diagnosis	Simulated enable/disable outputs
TCP calibration	Automatic calibration of TCP (Tool Center Point)

Safety features	
Specifications	Dual-channel safety system (Emergency stop, safety interlock), 3-position Dead-man's switch, European safety standards
Collision avoidance	Collision avoidance zones and radial interference zones
Collision detection	Monitors robot axes' torque levels

Control cabinet	
Dimensions	470 (W) x 200 (H) x 420 (D)
Weight	Approx. 20 kg
Protection class	IP20
Cooling system	Direct cooling
Ambient temperature	0° to +40°C (operation) -10° to +60°C (transport and storage)
Relative humidity	Max. 90 % non-condensating
Power supply (depends on type of manipulator)	<b>1-phase:</b> 230 VAC at 50/60 Hz <b>With optional trafo 3-phase:</b> 200/220 VAC at 50/60 Hz
Digital I/O	Card 1: 16 standard/12 system – Expandable to 1024 inputs/1024 outputs Card 2: 28 inputs/28 outputs (option)
Program memory	10.000 steps, 1.000 instructions and 1.500 PLC steps
Interface	Profibus (Slave), Ethernet IP (Master/Slave), DeviceNet (Master/Slave), CC-Link (Slave), Profinet (Master/Slave)
Color	Similar RAL7016, RAL9006

Option	
Transformer available in similar housing design	

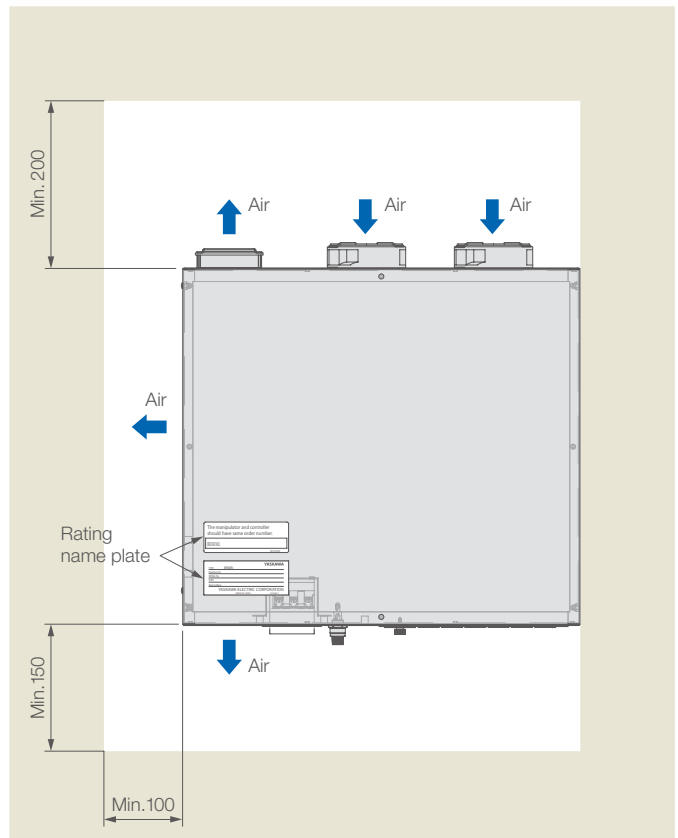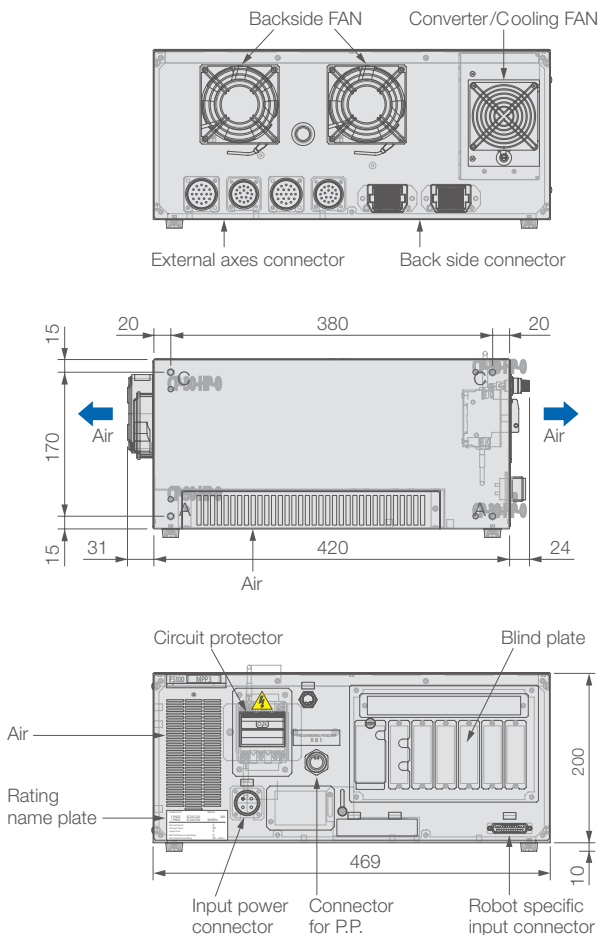

# YASKAWA

## YASKAWA Headquarters

YASKAWA Europe GmbH  
Robotics Division  
Yaskawastraße 1  
85391 Allershausen, Germany  
Tel. +49 (0) 8166/90-0  
Fax +49 (0) 8166/90-103

## YASKAWA ACADEMY and sales office Frankfurt

YASKAWA Europe GmbH  
Robotics Division  
Hauptstraße 185  
65760 Eschborn, Germany  
Tel. +49 (0) 6196/77725-0  
Fax +49 (0) 6196/77725-39

## YASKAWA GROUP

AT YASKAWA Austria  
Schwechat/Wien  
+43(0)1-707-9324-15

CZ YASKAWA Czech s.r.o.  
Rudná u Prahy  
+420-257-941-718

ES YASKAWA Ibérica, S.L.  
Gavà/Barcelona  
+34-93-6303478

FR YASKAWA France SARL  
Saint-Aignan-de-Grand-Lieu  
+33-2-40131919

FI YASKAWA Finland Oy  
Turku +358-(0)-403000600

GB YASKAWA UK Ltd.  
Banbury +44-1295-272755

IT YASKAWA Italia s.r.l.  
Torino +39-011-9005833

IL YASKAWA Europe Technology Ltd.  
Rosh Ha'ayin +972-3-9004114

NL YASKAWA Benelux B.V.  
Son +31-40-2895500

PL YASKAWA Polska Sp. z o.o.  
Wrocław +48-71-7928670

RU YASKAWA Nordic AB  
Moskva +46-480-417-800

SE YASKAWA Nordic AB  
Torsås +46-480-417-800

SI YASKAWA Slovenia  
Ribnica +386-1-8372-410

TR YASKAWA Turkey Elektrik  
Ticaret Ltd. Sti.  
İstanbul +90-216-5273450

ZA YASKAWA Southern Africa (PTY) Ltd  
Johannesburg +27-11-6083182

## DISTRIBUTORS

BG ARAMET ROBOTICS Ltd.  
Yambol +359-885 317 294  
Kammarton Bulgaria Ltd.  
Sofia +359-02-926-6060

CH Messer Eutectic Castolin  
Switzerland S.A.  
Dällikon +41-44-847-17-17

DK Robotcenter Danmark  
Løsning +45 7022 2477

EE RKR Seadmed OÜ  
Tallinn/Estonia +372-68-35-235

GR Gizelis Robotics  
Nea Kifissia +30-2106251455

HU Flexman Robotics Kft  
Budapest +36-30-9510065

LT Profibus UAB  
Panevezys +370-45-518575

NO Skala Robotech AS  
Lierstranda +47-32240600

PT ROBOPLAN Lda  
Aveiro +351-234 943 900

RO Sam Robotics srl  
Timisoara +40-720-279-866  
MPL Automation S.R.L.  
Satu Mare +40 (0) 261 750 741

